

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 291 804 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
12.03.2003 Bulletin 2003/11

(51) Int Cl.7: **G06K 7/00**

(21) Application number: **02017638.4**

(22) Date of filing: **06.08.2002**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **FCI**
75009 Paris (FR)

(72) Inventor: **Camacho, Gabriel**
57310 Guenange (FR)

(30) Priority: **07.08.2001 FR 0110673**

(74) Representative: **Beetz & Partner Patentanwälte**
Steinsdorfstrasse 10
80538 München (DE)

(54) **PCMCIA card with smart card reader**

(57) The invention relates to a PCMCIA card (1) with smart card reader (2), the card reader (2) having a card reader housing (3) forming an integral part of the PCMCIA card housing, into which it is possible to insert at least one smart card (4) perpendicularly to the plane of the card.

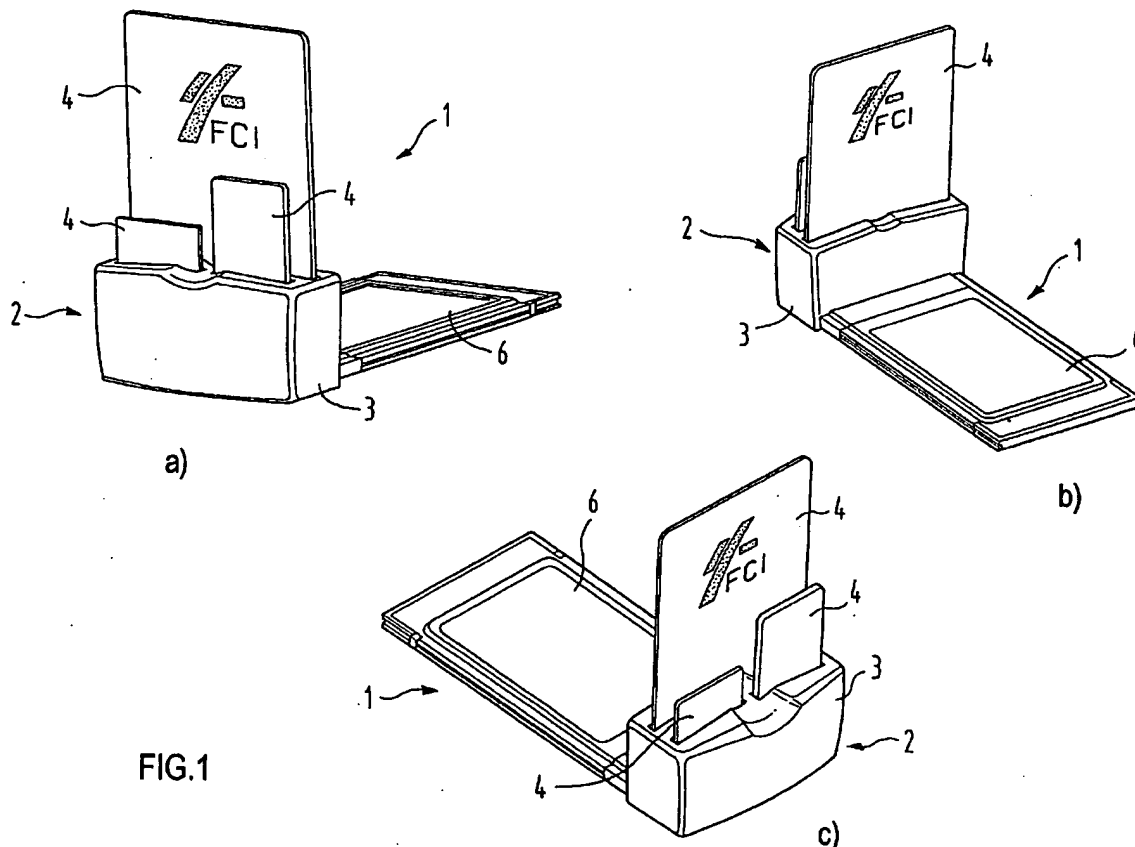


FIG.1

EP 1 291 804 A1

Description

[0001] The present invention relates to a PCMCIA card comprising a smart card reader.

[0002] PCMCIA cards are, for example, used to add supplementary functions to a computer such as for example a portable computer or for connecting the latter to external equipment or to a network.

[0003] Thanks to such a card, one can increase the capacity of the memory of a computer or make a connection to a telephone line or to a portable telephone. It is moreover possible not to use the PCMCIA card as a data or a function support itself, but to use it as an input/output unit for information stored on other data supports.

[0004] Such a card is known from document WO 00/77715 A1 which discloses a card reader into which a smart card is introduced in the direction of a longitudinal extension of the PCMCIA card at its back end. Because of the low available height of construction of such cards, construction-related limits are very rapidly reached when it is necessary to provide in the PCMCIA card another board in addition to the card reader. Similarly, the manipulation to introduce and withdraw the smart card turns out to be extremely difficult in a portable computer, due, for example to the small amount of space available and of the customary position of an insertion slot for a PCMCIA card.

[0005] A PCMCIA card with an integrated smart card reader is known from US-6 015 092, in which the smart card reader is arranged at the back end of the PCMCIA card perpendicularly to its longitudinal extension.

[0006] Document US-6 015 092 teaches how to hinge or attach a card reader to the back end of a PCMCIA card. In this housing, the card reader consists solely of a slot in an internal wall, where, in a defined space, a contact is provided to receive information from the smart card. This contact is connected to the board of the PCMCIA card by means of a flat flexible cable. This arrangement is not flexible as far as the choice of the card is concerned. No mechanics are provided, which are really suitable for a card reader. It is moreover necessary to provide on the board in the PCMCIA card, a zone on its surface, which can be wired with a flat flexible cable.

[0007] The purpose of the present invention is to develop a PCMCIA card of the type which enables the user to equip a PC or a portable computer in a simple manner with such a card and to place a card reader into his computer, which is easy to be used and flexible enough to be adapted to smart cards of different sizes.

[0008] This purpose is reached by a smart card reader, which has a card reader housing integrated into the PCMCIA card housing and into which at least one smart card can be inserted perpendicularly to the surface of the PCMCIA card.

[0009] According to one preferred form of embodiment of the present invention, the card reader housing extends the PCMCIA card housing at its back end and its bottom is aligned on the lower side of the PCMCIA

card.

[0010] According to another preferred form of embodiment, the card reader housing has, when it is inserted, the lateral wall to be plugged into, on the same level as the housing of the apparatus into which the PCMCIA card is inserted.

[0011] According to another preferred form of embodiment, several card readers are arranged in the card reader housing.

[0012] According to another preferred form of embodiment, the opening or openings for the insertion of smart cards are on the upper side of the card reader housing.

[0013] According to another preferred form of embodiment, the openings for the introduction of modules of the card reader are arranged in a parallel or an aligned manner.

[0014] According to another preferred form of embodiment, an opening for the introduction of a smart card of the size of a bank card and parallel to the latter, has two introduction openings arranged one next to the other for SIM cards.

[0015] According to another preferred form of embodiment, the card reader module is designed for sizes of smart cards such as media smart cards and/or smart cards and/or MMC cards and/or memory cards.

[0016] According to another form of embodiment, the card reader housing is essentially rectangular and its upper face has a gripping cavity to facilitate the withdrawal of smart cards.

[0017] According to another form of embodiment, the bottom of the PCMCIA card housing is extended by a bottom module, which can be locked to the latter by the bottom of the card reader housing, a module to which it is possible to attach the upper part of the card reader housing.

[0018] According to another form of embodiment, the card reader housing and the module or modules of the card reader, are connected on their lower ridge to the PCMCIA card by means of printed circuit connectors.

[0019] According to another form of embodiment, the bottom of the card reader housing is fixed by means of lateral bars to the protective screen of the bottom of the PCMCIA card housing by interlocking.

[0020] According to another form of embodiment, a central part of the card reader housing comprises in one piece, the lateral walls as well as a shutter for covering the zone of connection to the PCMCIA card, which covers an upper protective screen in this zone.

[0021] In the paragraphs which follow, the invention is explained in greater detail with the help of the description of an embodiment example referring to drawings.

Fig. 1 shows perspective views of the PCMCIA card according to the invention with a smart card reader;

Fig. 2 shows the introduction of a card according to the invention into a portable computer;

6. A PCMCIA card according to Claim 5, **characterised in that** the insertion openings (10) of the card reader (11) modules are arranged parallel and/or aligned. 5
7. A PCMCIA card according to Claim 6, **characterised by** an insertion opening (10) for a smart card (4a) with the size of a bank card and parallel thereto two insertion openings (10) for SIM cards, arranged one next to the other. 10
8. A PCMCIA card according to one of the Claims from 5 to 7, **characterised in that** the card reader module (11) is designed for smart card sizes such as media smart cards (4d) and/or smart cards (4a) and/or MMC cards (4c) and/or memory cards (4b) 15
9. A PCMCIA card according to one of the Claims from 1 to 8, **characterised in that** the housing of the card reader (3) is essentially rectangular and that its upper face has a gripping cavity to facilitate the withdrawal of smart cards (4). 20
10. A PCMCIA card according to Claim 1, **characterised in that** the bottom of the PCMCIA card (8) is extended by a bottom module which can be locked to it by the bottom of the card reader housing (7), the module to which it is possible to attach the upper part of the card reader housing (3a) 25 30
11. A PCMCIA card according to one of the preceding Claims, **characterised in that** in the card reader housing (3), the module or modules of the card reader (11) is/are connected to their lower ridges to the PCMCIA card (1) by means of printed circuit connectors (13). 35
12. A PCMCIA card according to Claim 2, **characterised in that** the bottom (8) of the card reader housing (3) is fixed by locking by lateral bars (8a, 8b) to the bottom protective screen (7) of the PCMCIA card (6). 40
13. A PCMCIA card according to Claim 2, **characterised in that** a median part (3b) of the card reader (3) comprises in one piece, lateral walls as well as a shutter (16) to cover the zone of connection to the PCMCIA card (1) which covers an upper protective screen (15) in this zone. 45 50

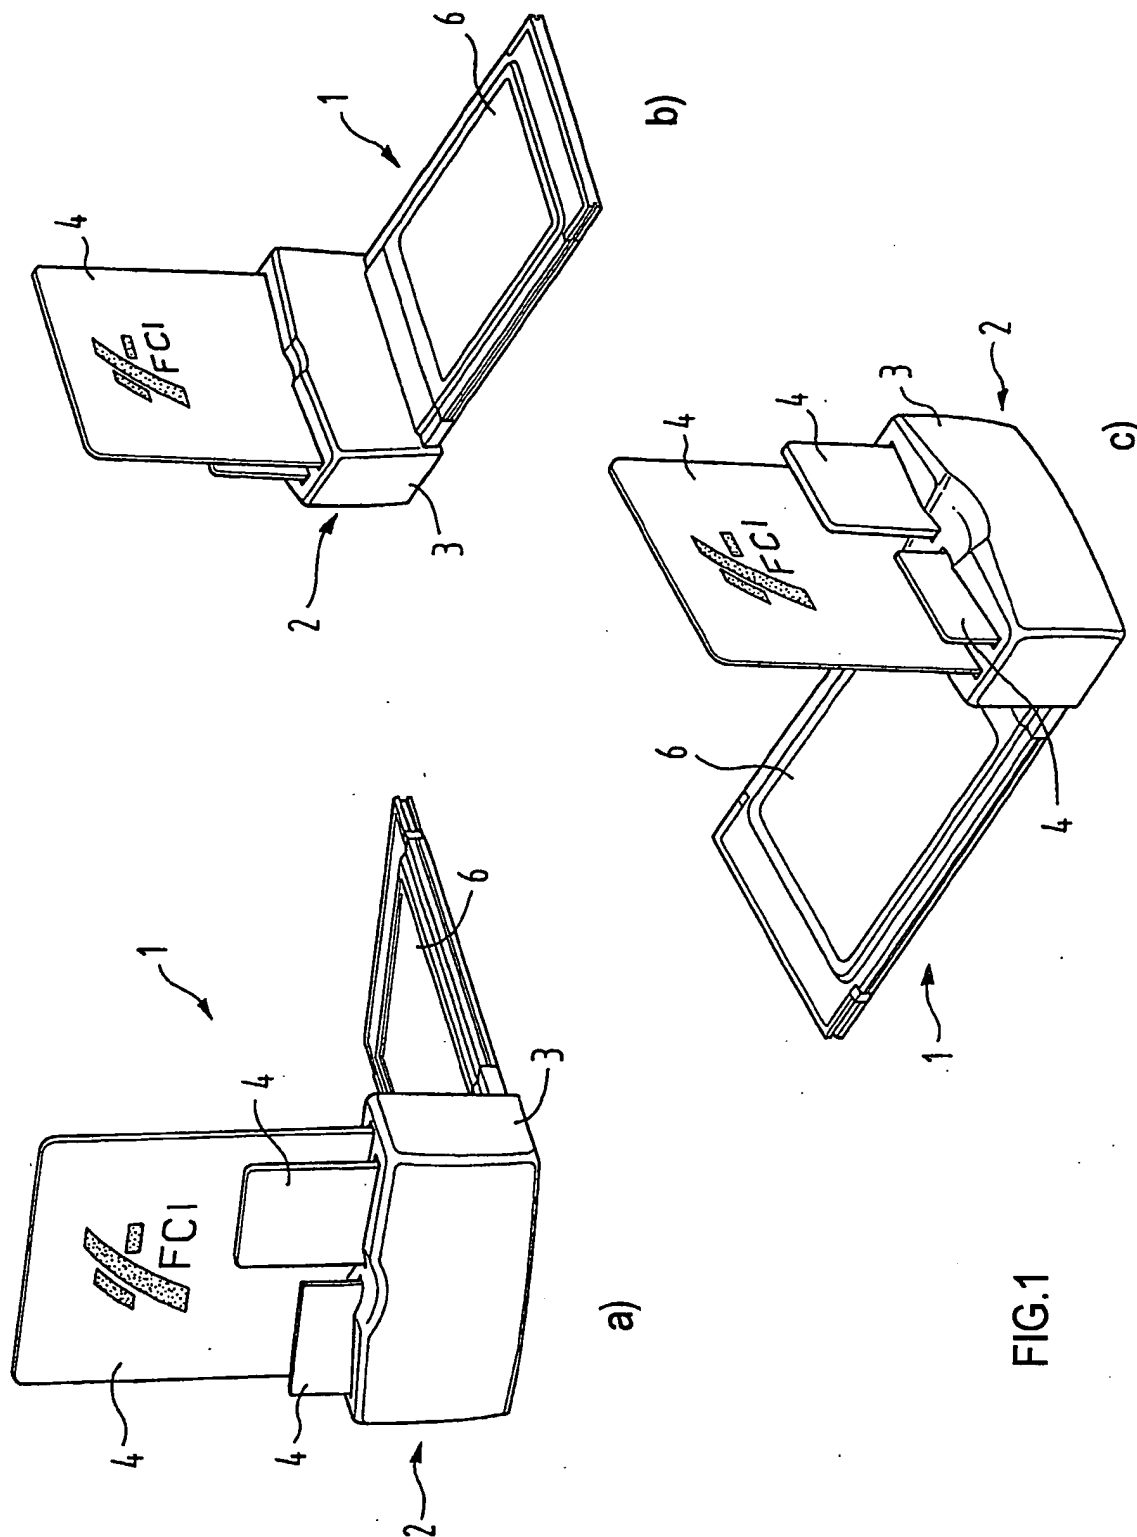


FIG.1

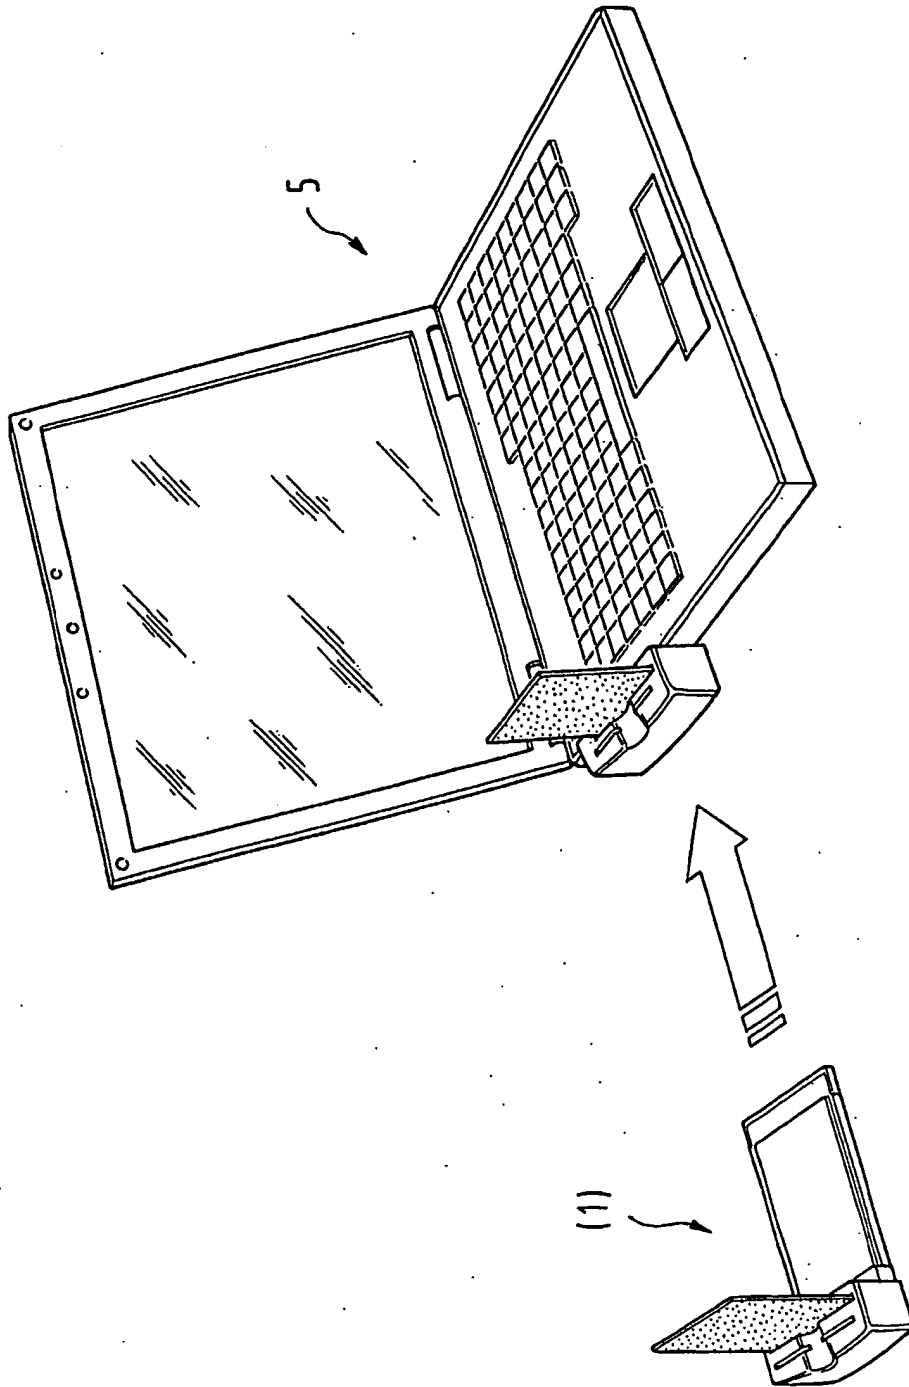


FIG.2

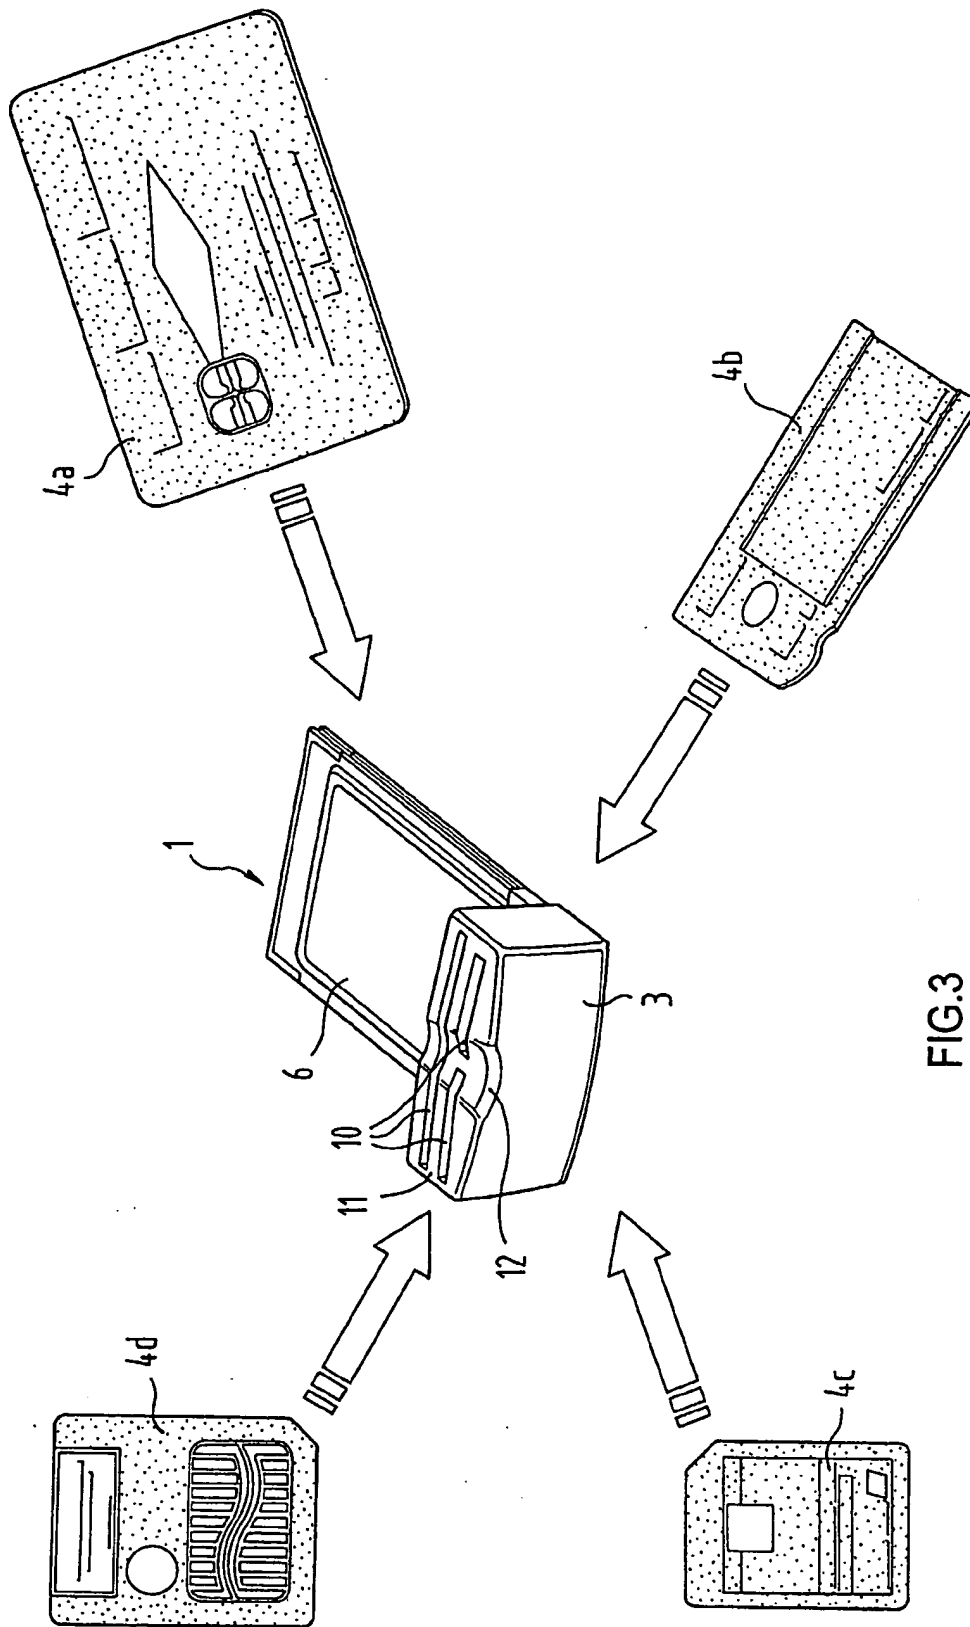


FIG.3

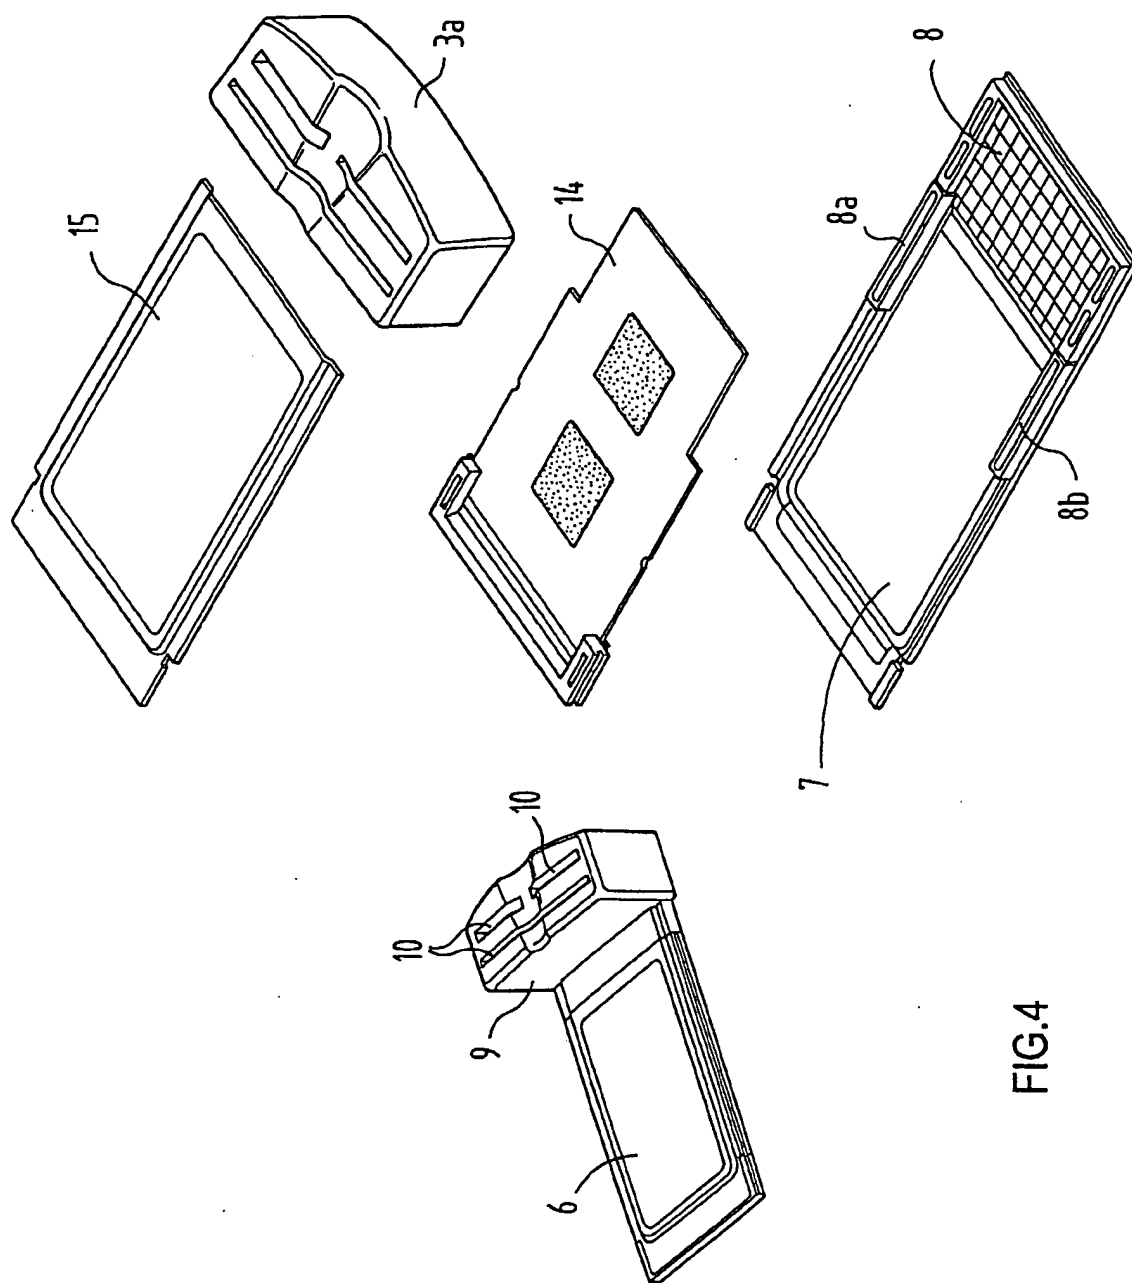


FIG.4

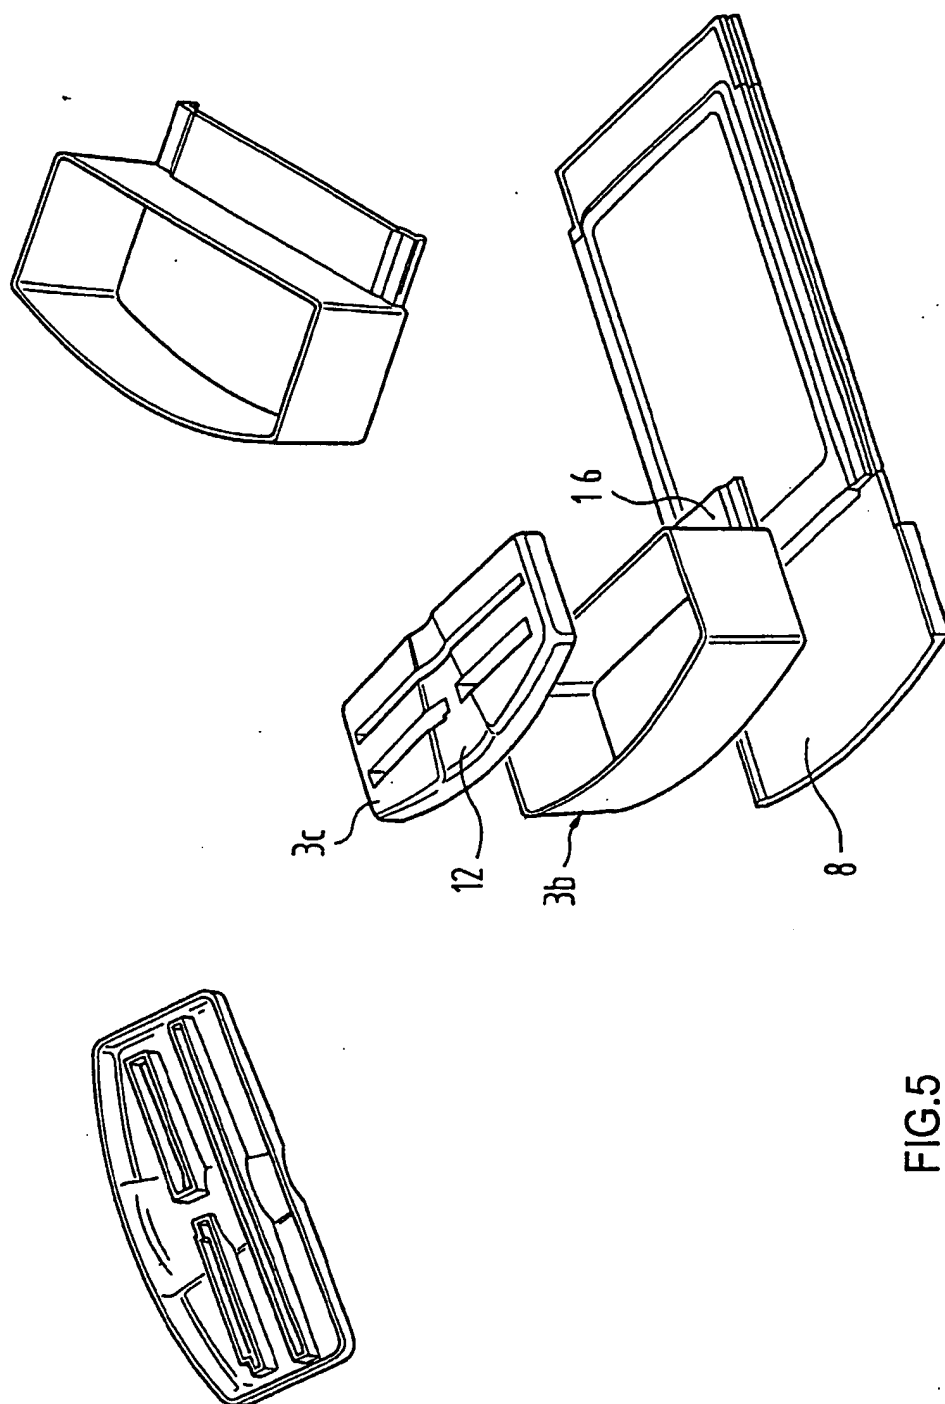


FIG.5

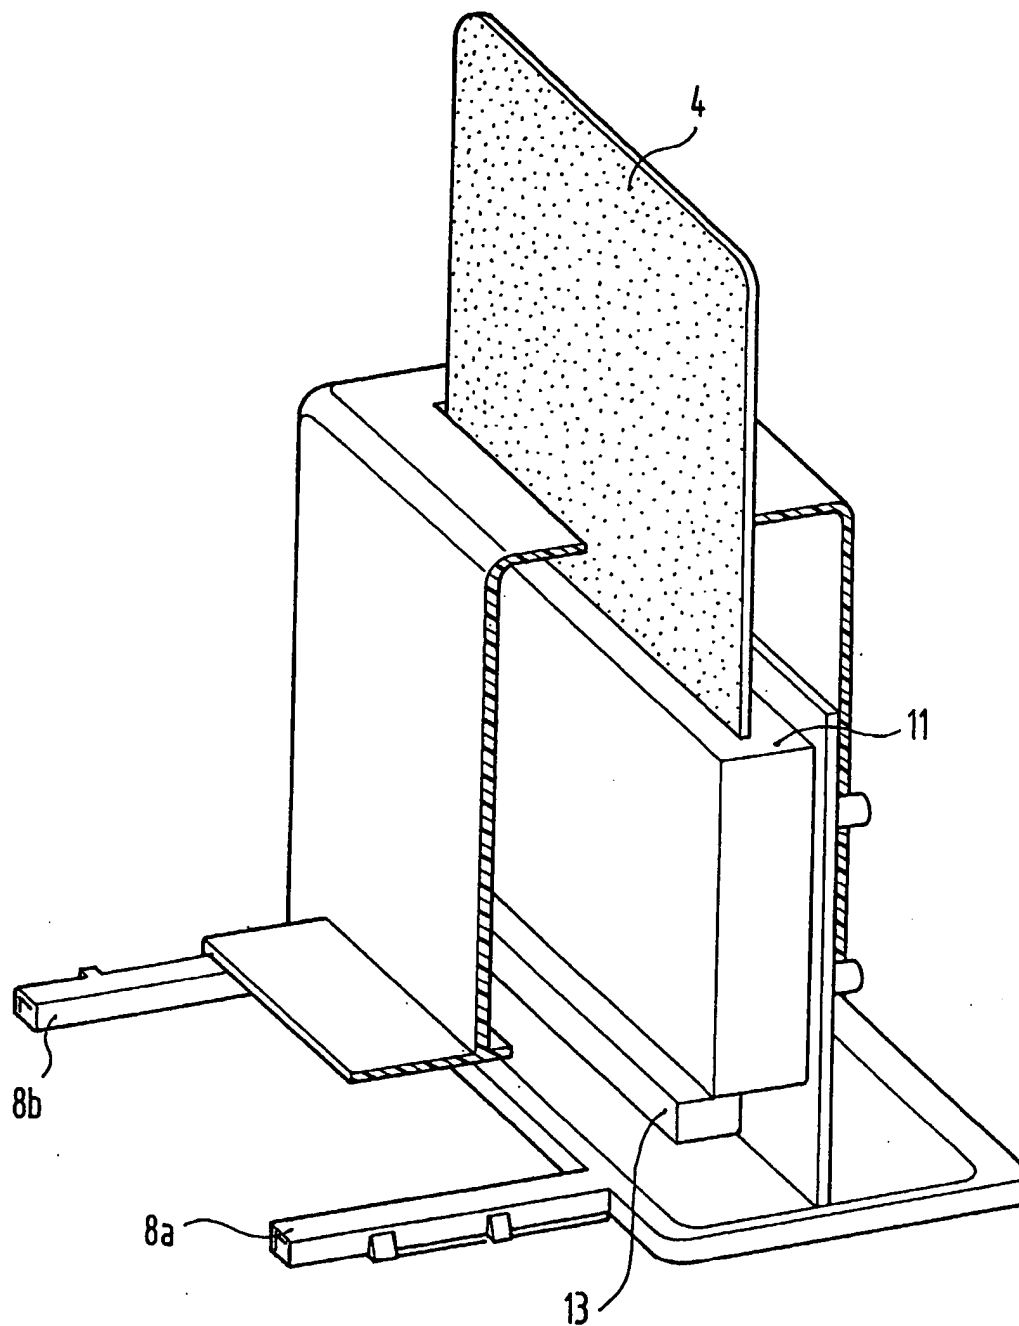


FIG.6

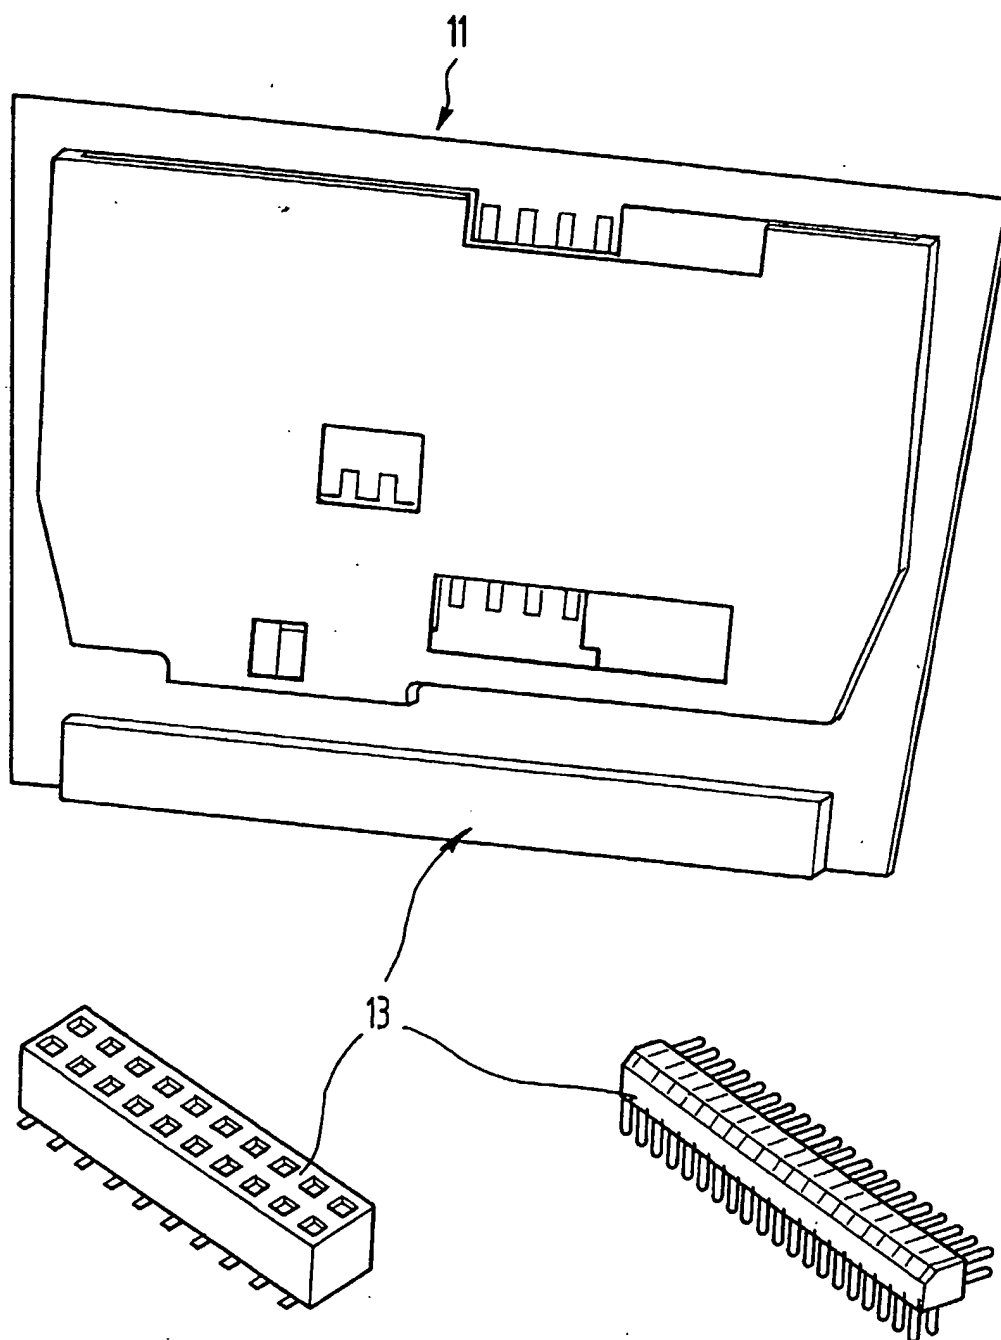


FIG.7



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 01 7638

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
D,X	US 6 015 092 A (POSTLEWAITE WILLIAM M ET AL) 18 January 2000 (2000-01-18)	1-3,5	G06K7/00
Y	* column 4, line 16 - line 26; figures 1,5 *	4-9	
Y	US 5 679 007 A (BIZET BRUNO ET AL) 21 October 1997 (1997-10-21) * column 5, line 31 - line 35; figure 2A *	4-8	
Y	US 5 272 319 A (REY JEAN-YVES) 21 December 1993 (1993-12-21) * figure 1 *	9	
A	FR 2 774 193 A (SCM SCHNEIDER MICROSYSTEME MIC) 30 July 1999 (1999-07-30) * abstract; figure 1 *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			G06K
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 10 January 2003	Examiner Chiarizia, S
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 01 7638

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-01-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6015092	A	18-01-2000	NONE	
US 5679007	A	21-10-1997	FR 2722589 A1	19-01-1996
			FR 2728709 A1	28-06-1996
			AT 170305 T	15-09-1998
			DE 69504259 D1	01-10-1998
			DE 69504259 T2	08-04-1999
			EP 0696010 A1	07-02-1996
			ES 2121310 T3	16-11-1998
			JP 8063556 A	08-03-1996
US 5272319	A	21-12-1993	NONE	
FR 2774193	A	30-07-1999	FR 2774193 A1	30-07-1999
			EP 1050007 A1	08-11-2000
			WO 9938105 A1	29-07-1999
			JP 2002501260 T	15-01-2002

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82